

EcoMiser BigFoot™

38355

Elongated Front, RelaxedHeight™,
12" [305 mm] Rough-in, Dual-Flush, Two Piece Toilet



Features

- Environmentally Friendly
- Push Lever Down for High Efficiency Flush [1.1 gpf / 4.0 lpf] Push Lever Up for Full Flush [1.6 gpf / 6.0 lpf]
- Qualifies for One [1] LEED point
- RelaxedHeight™ 16-5/8" [422 mm]
- Wider BigFoot™ Base for Excellent Retrofit Installation
- Powerful and Quiet EcoFlush™ Pressure Assist Flushing Technology
- No Tank Sweating or Flapper Leaking
- Large Water Surface Area
- 2" [51 mm] Trapway
- Sanitary Bar for Easy Cleaning
- Available in White, Bone and Biscuit
- Limited Lifetime Warranty



Shown with 8080 "Lift 'n' Clean" toilet seat

Model # Description

38355	Elongated front, RelaxedHeight™ 16-5/8" [422 mm], two-piece toilet combination. 12" [305 mm] rough-in. Includes EcoFlush™ pressure assist vessel and side mounted, left hand, polished chrome trip lever. Less toilet seat and supply.
31128	Elongated front, RelaxedHeight™ 16-5/8" [422 mm], toilet bowl. 12" [305 mm] rough-in. Less toilet seat.
31500	Tank and cover only with side mounted, left hand, polished chrome trip lever. Less supply.

Optional Tanks

31501	Same as 31500 with right hand trip lever
TP	Tamper proof locking lid [add "TP" to any tank model number]



31501 Right hand trip lever

The Green Building / LEED programs was created to provide contractors, building engineers, developers and architects with incentives or rewards for utilizing energy saving and water conservation products in the construction or renovation of their buildings. The LEED program provides points or credits that can be used to offset elements of the construction that would be debits against the property. Using a 1.6 gpf / 6.0 lpf toilets as the baseline, a HET toilet or HEU urinal that has a minimum average water savings of 20% can earn one (1) LEED point, or a minimum water savings of 32% can earn two (2) LEED points.

ECO|FLUSH

EcoSolutions®
The Green Choice



High Efficiency Toilet

HET

RelaxedHEIGHT™

ADA




C

This fixture qualifies according to ASME test procedures as a high efficiency toilet (HET) with an average consumption of 1.28 gpf / 4.8 lpf or less with a minimum water savings of 20%.

Specifications

Water Pressure Range: 20 to 80 P.S.I.
 Flush System: EcoFlush™ Dual Flushing Technology
 Water Usage: 1.1 gpf / 4.0 lpf or 1.6 gpf / 6.0 lpf
 Water Surface Area: 12-1/4" x 8-3/4"
 [311 mm x 222 mm]
 Trap Diameter: 2" [51 mm]
 Water Seal: 2-1/2" [64 mm]
 Shipping Cubes:
 31128 Bowl: 4.0 ft³ [1.2 m³]
 31500 Tank: 2.5 ft³ [.07 m³]
 Shipping Weight:
 31128 Bowl: 50 lbs [23 kg]
 31500 Tank: 42 lbs [19 kg]
 Warranty :
 Vitreous China - Limited Lifetime
 Vessel - Ten Year Limited
 Parts - One Year Limited

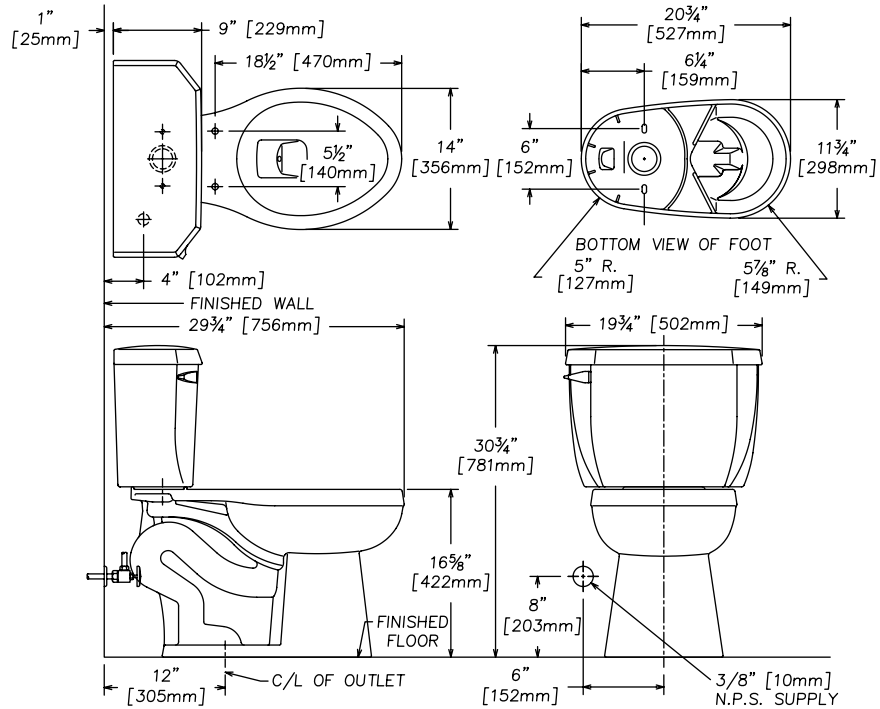

IMPORTANT: These dimensions are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2 Contact your local building code for approved barrier free measurements.

Features and Upgrades



P030219 - Left Hand Trip Lever
 P030223 - Right Hand Trip Lever
 Pressure assist vessel with dual-flush operation 1.1 gpf/4.0 lpf or 1.6 gpf/6.0 lpf. Save up to 40% more water than conventional toilets.



P030374 - Left hand trip lever
 Dual-flush operation. Lift up for 1.1 gpf / 4.0 lpf or push down for 1.6 gpf / 6.0 lpf. Available in Polished Chrome



P030375 - Right hand trip lever
 Dual-flush operation. Lift up for 1.1 gpf/4.0 lpf or push down for 1.6 gpf/6.0 lpf. Available in Polished Chrome



8080 - Elongated "Lift 'n' Clean" toilet seat. Seat components can be removed for easier cleaning.

Customer Service United States
 41 Cairns Road
 Mansfield, OH 44903
 Email: customerservice@craneplumbing.com

Customer Service Canada
 15 Crane Ave.
 Stratford, ON N5A 6T3
 Email: sales@craneplumbing.ca

www.cranepumbing.com

www.cranepumbing.ca

