

# 3195



Low Consumption Water Closet Bowl Vitreous China

### **FEATURES**

#### • 3195 Civic™ Bowl

**Bowl:** 3195 Civic<sup>™</sup> vitreous china, (1.6 gpf / 6.0 lpf), siphon action, back spud, regular rim closet bowl with self-draining jet and bolt caps.

**Valve:**\* Flushvalve with vacuum breaker, 1" angle screwdriver stop and flush connection. Suggested (1.6 gpf / 6.0 lpf) flushvalves are:

#120-1.6-U

Sloan "Royal"

Supply:

Seat:

Color:

# NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- Furnished as standard with 1 1/4" I.P.S. brass inlet spud.
- Available (when specified) with 1 1/2" or 2" I.P.S. brass inlet spud.
- Fully glazed trapway.

# WATER ECONOMY FACTS

Average Gallons Per Flush	20 PSI	50 PSI	80 PSI
3195	1.16	1.24	1.26
Trapway1 3/4"			
Trapway1 <sup>3</sup> / <sub>4</sub> " Water Surface8 x 8"			
Water Seal2 1/2"			








3195

#### 12" Rough-In Low Consumption Bowl

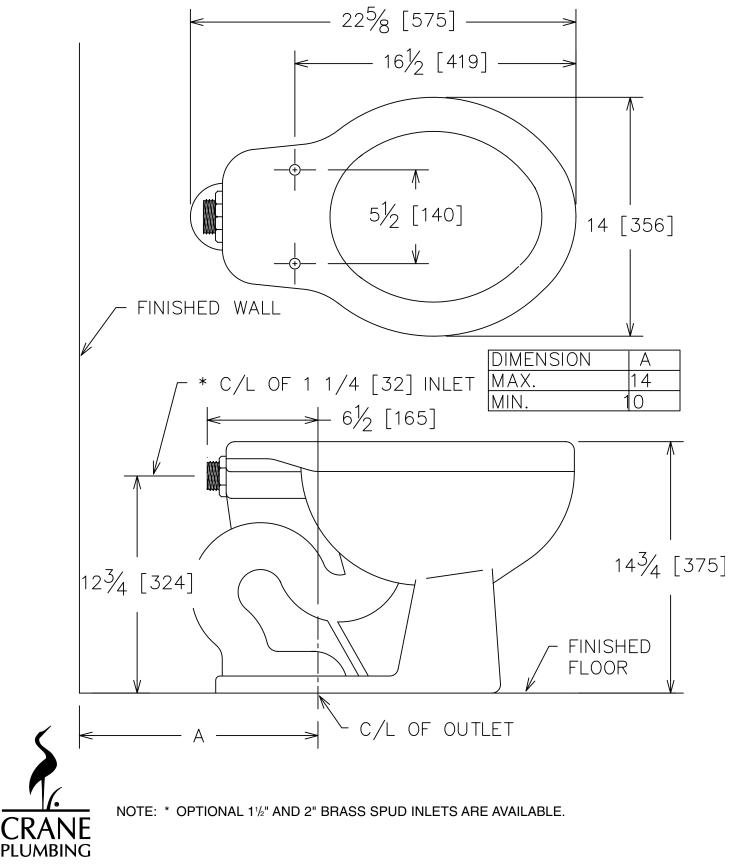

Universal-Rundle IMPORTANT: Roughing-in dimensions may vary ½" and are subject to change or cancellation without prior notice. No responsibility is assumed for use of superseded or voided leaflets. CR/PL© 12/02 Printed in U.S.A.