



Placidus™

3446

*Elongated Front,
Wall Mounted, Flush Valve Bowl*



Features

- 1.6 gpf / 6.0 lpf Flush Valve
- Fixture Complies To ADA Requirements When Mounted at Rim Height of 17" [432 mm]
- Wall Mounted Installation Allows for Easy Cleaning
- Large Water Surface Area
- 2" [51 mm] Fully Glazed Trapway
- Available in White, Bone and Biscuit
- Limited Lifetime Warranty



Seat not included

Model

Description

Model #	Description
3446	Elongated front, wall mounted toilet. 1-1/2" [38 mm] top spud. Less toilet seat and flushometer.



Specifications

Water Pressure Range: 20 to 80 P.S.I.

Water Usage: 1.6 gpf / 6.0 lpf

Water Surface Area: 12" x 10"
[305 mm x 254 mm]


Trap Diameter: 2" [51 mm]

Water Seal: 2-1/4" [57mm]

Shipping Cubes: 3.4 ft³ [.10 m³]

Shipping Weight: 54 lbs [24 kg]

Warranty: Limited Lifetime

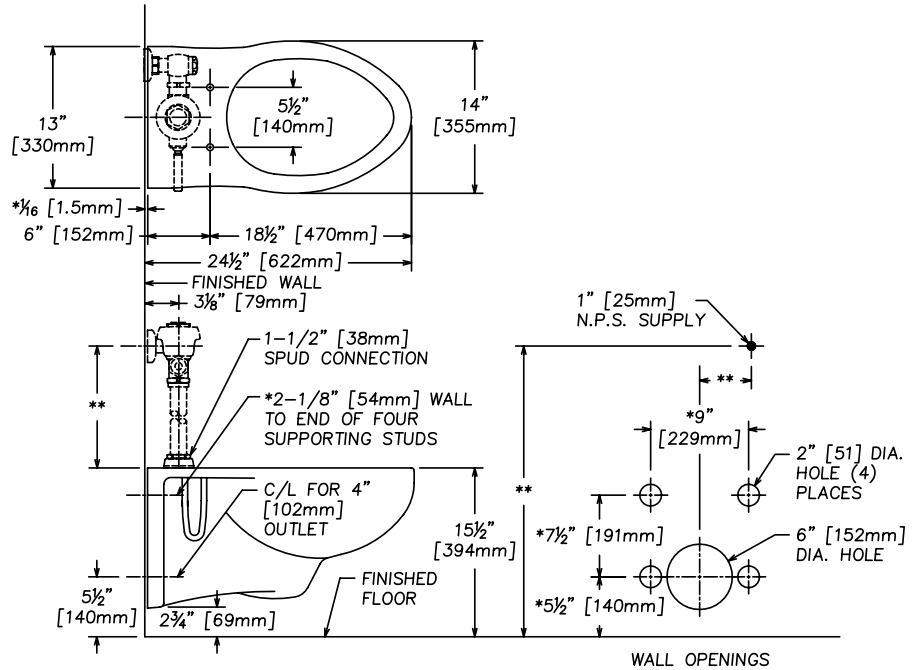

NOTE: ROUGHING-IN DIMENSIONS FOR CLOSET SUPPORT UNIT TO BE OBTAINED DIRECT FROM MANUFACTURER. CHECK WITH MANUFACTURER FOR PROPER OUTLET COUPLING EXTENSION BEYOND THE FINISHED WALL.

FOR OUTLET CONNECTION USE NEOPRENE OR RUBBER GASKETS. NOT FOR USE WITH A WAX RING.

* THESE DIMENSIONS MUST BE MAINTAINED FOR PROPER INSTALLATION.

** VARIABLE - CHECK WITH MANUFACTURER OF FLUSHVALVE FOR PROPER ROUGHING-IN DIMENSIONS.

*** FIXTURE CONFORMS WITH AMERICANS WITH DISABILITIES ACT WHEN MOUNTED AT RIM HEIGHT OF 17".

IMPORTANT: These dimensions are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2. Contact your local building code for approved barrier free measurements.

Customer Service United States
41 Cairns Road
Mansfield, OH 44903
Email: customerservice@craneplumbing.com

Customer Service Canada
15 Crane Ave.
Stratford, ON N5A 6T3
Email: sales@craneplumbing.ca

www.cranepumbing.com

www.cranepumbing.ca