



**Blow-Out Wall-Hung  
Service Sink**  
Vitreous China

## FEATURES

- **7H544 Sani-Sink™**

7H544 Sani-Sink™ vitreous china wall hung blowout flushing rim service sink with 1 1/2" top inlet.

**Trim:**

**Valve:**\* Flush valve with vacuum breaker, 1" angle screwdriver stop and flush connection. Suggested (6.5 gpf / 24.6 lpf) flushvalves are:

Sloan "Royal"	#117
Delany "Flushboy"	#F418
Zurn "Aquaflush"	#Z-6017XL-H


**Bedpan Cleanser:**

**Supports:**

## NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- For efficient operation of the sink, a minimum flowing water pressure of 25 P.S.I. is required at the valve.

## Vitreous China Blow-Out Wall-Hung Service Sink

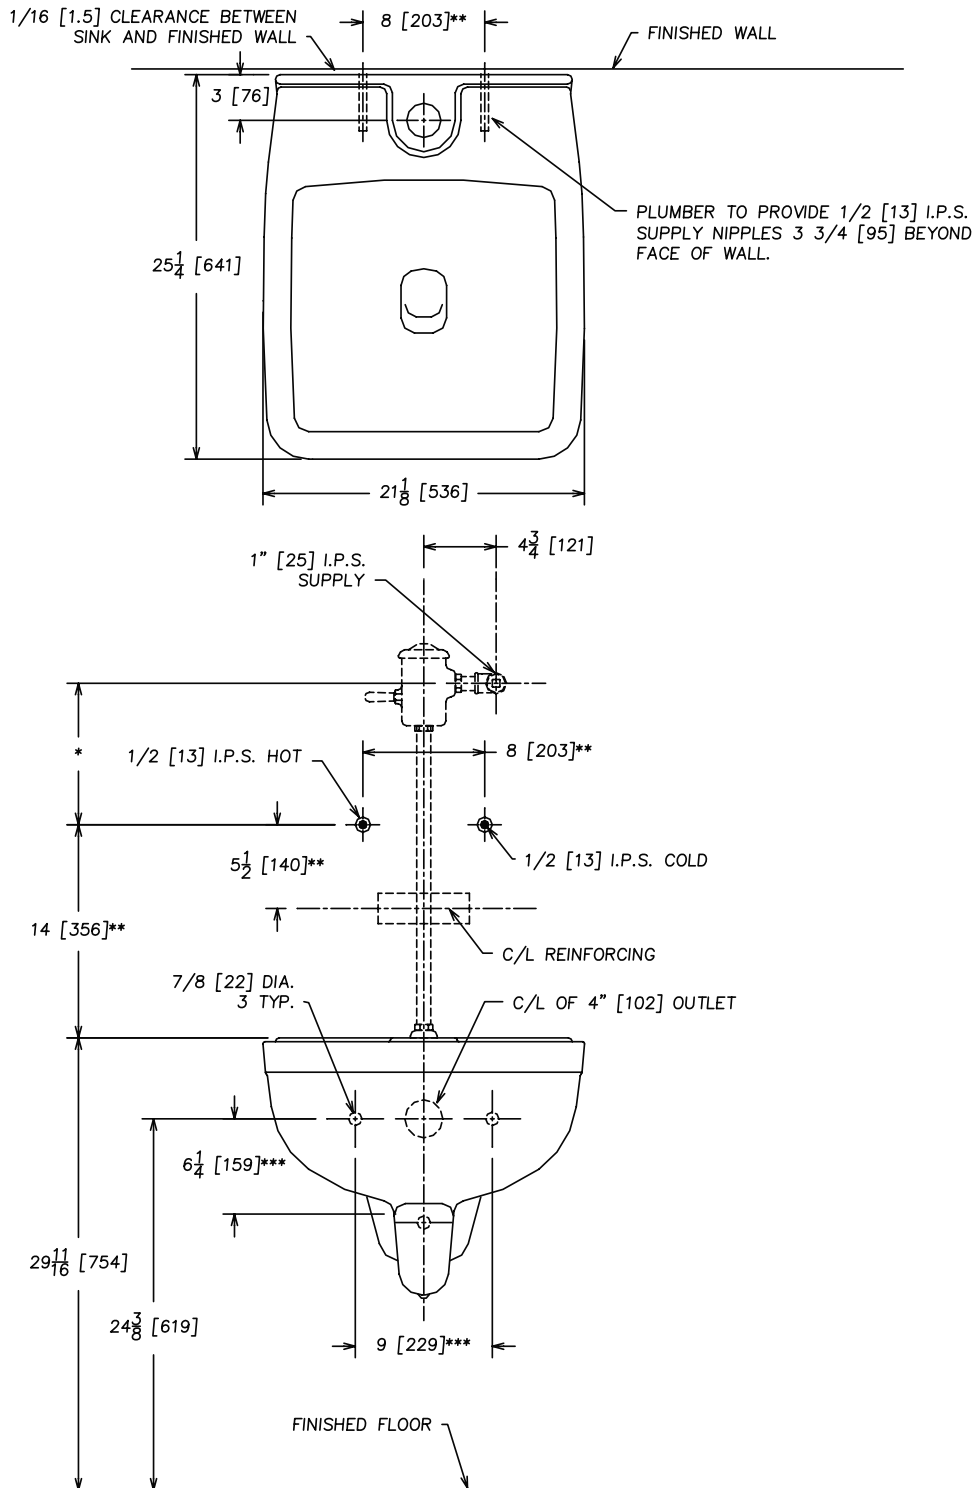

- NOTE: \* VARIABLE-CHECK WITH MANUFACTURER OF FLUSHVALVE FOR PROPER ROUGHING-IN DIMENSIONS.  
 \*\* VARIABLE-CHECK WITH MANUFACTURER OF SERVICE SINK FAUCET FOR PROPER ROUGHING-IN DIMENSIONS.  
 \*\*\* MUST BE MAINTAINED FOR PROPER ROUGH-IN OF THE CHAIR CARRIER. (CARRIER SUPPLIED BY OTHERS).